

Multi Conductor

Conductor construction is soft drawn bare copper meeting the requirements of ASTM Specification B-3. The 18 awg conductors are solid copper.

The insulation is a color coded high quality polyvinylchloride (PVC) for systems applications of up to 30 volts and conductor temperatures up to 60° C. The outer jacket is linear low density, high molecular weight polyethylene (PE) with a nylon cord.

Application: Suitable for use as direct burial control cable for wiring central control systems to field controls.

Conductor: Soft drawn bare copper (ASTM Spec. B-3)
Solid (18 awg)


Insulation: Color coded polyvinylchloride (PVC)

Outer Jacket: Black polyethylene (PE)

Temperature: 60° C

Voltage: 30 volts

Conductor Size and Number	Conductor Insulation	Outer Jacket
18-2	.015	.025
18-3	.015	.025
18-4	.015	.025
18-5	.015	.025
18-6	.015	.025
18-7	.015	.025
18-8	.015	.025
18-9	.015	.025
18-10	.015	.025
18-12	.015	.025
18-13	.015	.025
18-16	.015	.025
18-19	.015	.025
18-25	.015	.025

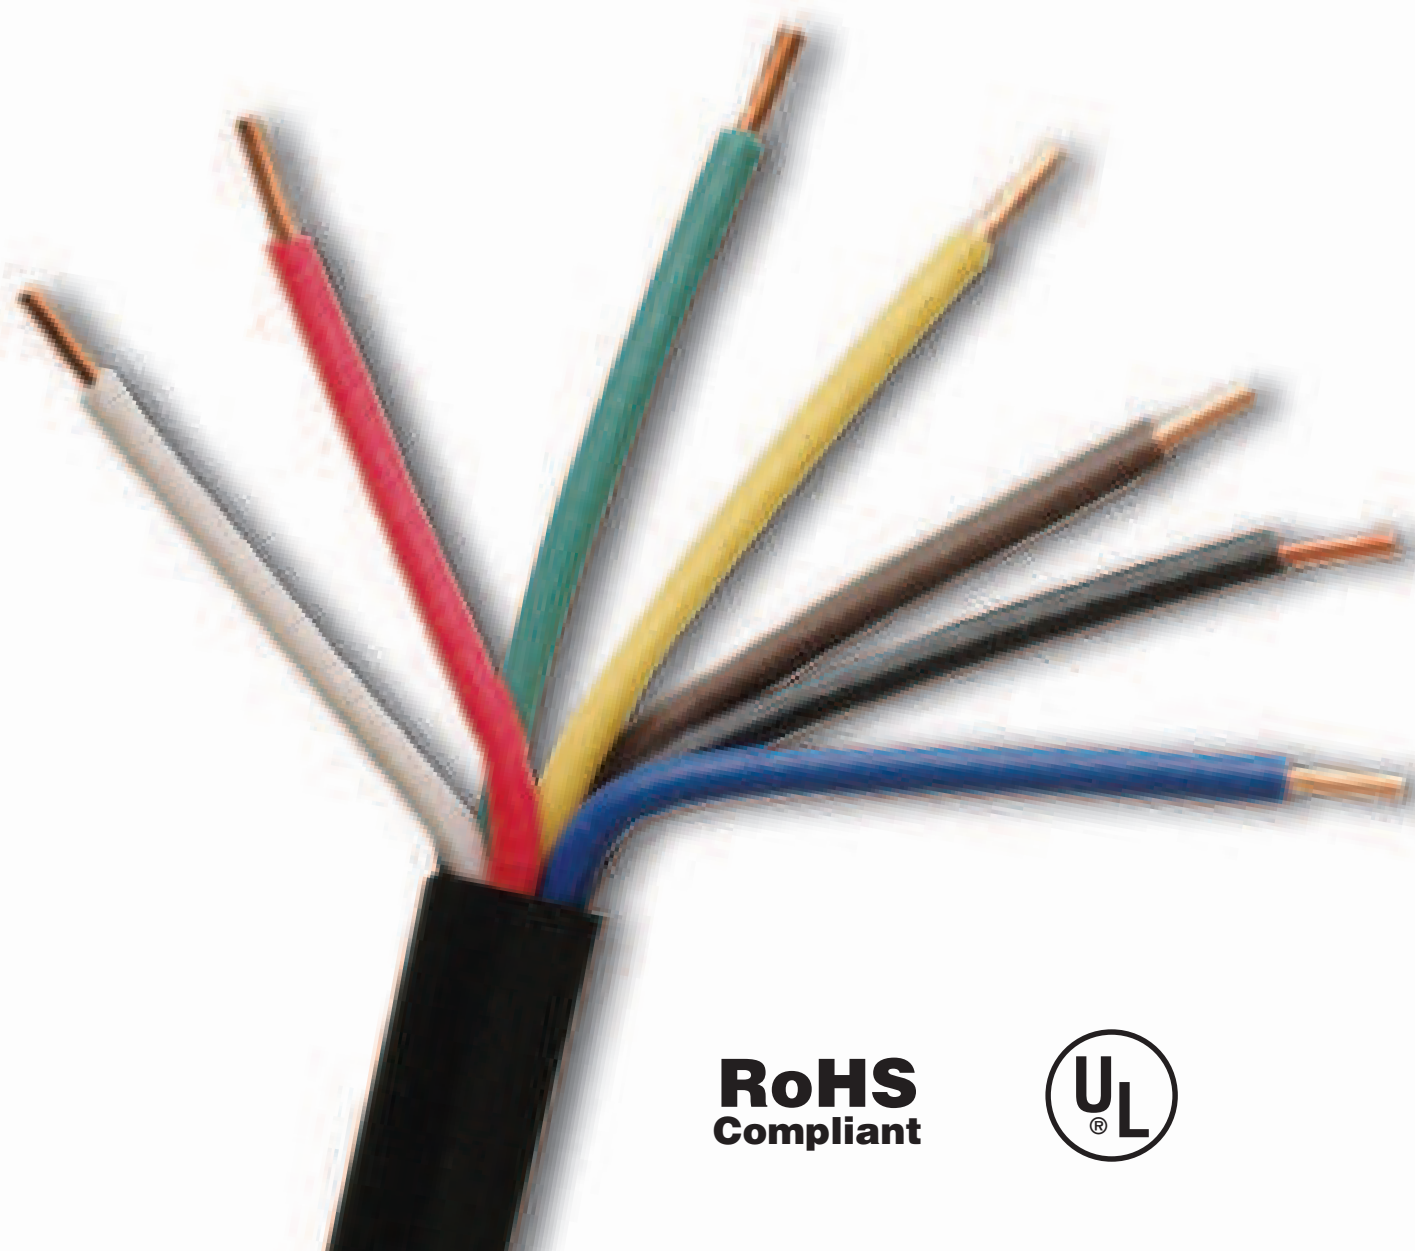

RoHS
Compliant



Regency's Multi Conductor Irrigation Control Cable is manufactured for the purpose of direct burial control cable applications in accordance with the National Electric Code.