

Multi Conductor

Conductor construction is soft drawn bare copper meeting the requirements of ASTM Specification B-3. The 18 awg conductors are solid copper.

The insulation is a color coded high quality polyvinylchloride (PVC) for systems applications of up to 600 volts and conductor temperatures up to 60° C. The outer jacket is linear low density, high molecular weight, sunlight resistant, polyethylene (PE) with a nylon cord.

Application: Suitable for use as direct burial control cable for wiring central control systems to field controls.

Conductor: Soft drawn bare copper (ASTM Spec. B-3), Solid (18 awg).


Insulation: Color coded polyvinylchloride (PVC)

Outer Jacket: Black polyethylene (PE)

Temperature: 60° C

Voltage: 600 volts

Conductor Size and No.	Conductor Insulation	Outer Jacket
18-2	.015	.030
18-3	.015	.030
18-4	.015	.030
18-5	.015	.030
18-6	.015	.030
18-7	.015	.030
18-8	.015	.030
18-9	.015	.030
18-10	.015	.030
18-12	.015	.030
18-13	.015	.030
18-16	.015	.030
18-19	.015	.030
18-25	.015	.030

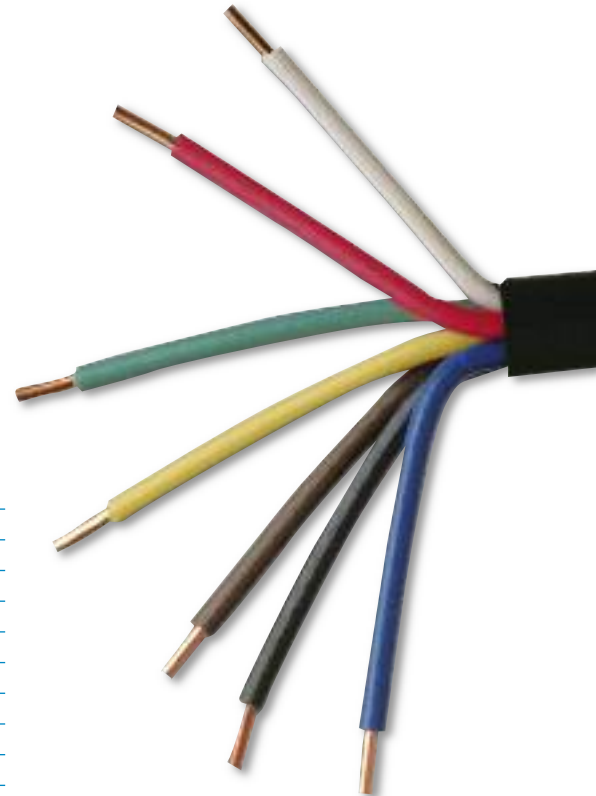

RoHS
Compliant

