

Toro® GDC Decoder Cable

Conductor construction is soft drawn bare copper meeting the requirements of ASTM Specification B-3. Toro® GDC Decoder Cable features solid copper conductors.

Both the conductor insulation and overall jacket are linear low density, high molecular weight polyethylene. The conductors are twisted with a 4" lay and rated for systems applications of up to 600 volts. Individual conductor colors are black and white.

Application: Suitable for use in direct burial applications for communication with and control of Toro® decoder systems.

Conductor: Solid soft drawn bare copper (ASTM Spec. B-3 or B-8).

Insulation: Polyethylene (PE)


Jacket: Polyethylene (PE)

Temperature: 60° C

Voltage: 600 volts

Colors: Red, blue, green and yellow.

Regency's Toro® Decoder Cable is manufactured for the purpose of direct burial power wire applications in accordance with the National Electric Code.

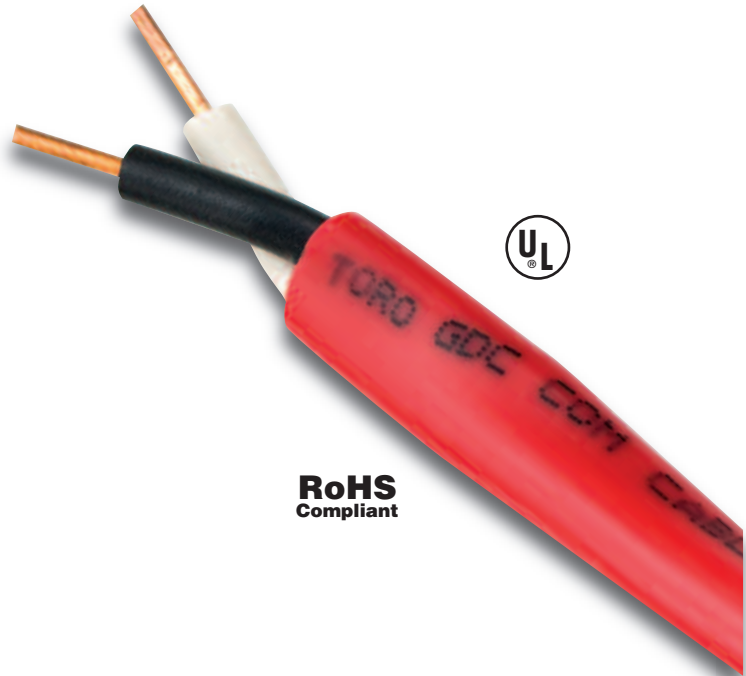

**RoHS
Compliant**

Conductor Size	Insulation Thickness	Jacket Thickness
14 awg	.045	.035